



Fireplace Model # 3400



Instruction Manual

Instructions and warnings for use



Welcome to the Real Flame® family of gel fuel products. If you have any questions please call customer service at **1-800-654-1704** or log on to **www.REALFLAME.com**.

STOP!

If parts are missing or damaged, call **1-800-654-1704** for assistance

WARNINGS

1. Fireplace is designed to be used with Real Flame® gel fuel only. Do not use with any other gel fuel or any other flammable liquid or gel.
2. Read entire label and instructions before using Real Flame gel fuel.
3. Make sure fireplace is set on a flat, level and stable surface. Keep fireplace stable at all times.
4. Make sure fireplace and gel fuel are burned on a flat and level surface.
5. Never leave a burning fire unattended, especially around children or pets.
6. Fireplace is not to be operated by children. Keep away from children and pets.
7. Exercise the same precautions as you would with any open fire.
8. When in use some surfaces will be hot, use caution.
9. Never touch logs, gel fuel cans or any other metal surfaces during or immediately after burning gel fuel. They will be extremely HOT. Allow them to cool for 60 minutes before touching.
10. Do not burn more than three cans of fuel at once.
11. Do not place more than 15 lbs. of weight on the top of the fireplace at anytime.
12. Do not alter fireplace, metal firebox or log set in any manner.
13. Keep fireplace and gel fuel cans away from flammable materials at all times.
14. Do not store or use gasoline or any other flammable vapors, liquids, or materials in the vicinity of fireplace and gel fuel.
15. Do not wear flammable or loose clothing when operating the fireplace.
16. Do not move fireplace while in use. Do not attempt to move or store the fireplace until 60 minutes after gel fuel cans have been extinguished.
17. Do not burn trash, paper, or wood in the fireplace. Burn only Real Flame® gel fuel in the fireplace.
18. Do not burn gel fuel outside designated burn areas on the metal grate.
19. Do not put fireplace in an area with lots of traffic, such as a hallway or entryway.
20. In case of an emergency use a CO2 extinguisher to extinguish the fire.
21. Death, serious injury or damage to property may occur if the warnings above are not followed.
22. If for any reason you cannot follow these warnings please call us at 1-800-654-1704.

NOTICE: Buyer assumes all responsibility for safety and use that is not in accordance with instructions and warnings.

Using your Fireplace




- Follow all instructions included with gel fuel before use.
- Before using Fireplace make sure you have read and understand the step-by-step instructions.
- During the initial burn you may experience a slight odor. This odor is temporary and will be absent on following burns.



3400 Cross Loop Instructions



Parts List

Number	Description	Part Number	Quantity
1	Base	3401	1
2	Left Side Panel	3402	1
3	Right Side Panel	3403	1
4	Left Trim Post	3404	1
5	Right Trim Post	3405	1
6	Center Panel	3406	1
7	Center Facing	3406A	1
8	Mantel Top	3407	1
9	Firebox	4099	1
10	Mantel Grate	0001	1
11	Mantel Log	2605	1
<i>(Pictured on page 5)</i>			
	Firebox Clips	1075	2
	2 1/4" Bolts	9719	4
	5/8" Screws	9713	8
	Allan wrench	9715	1

Before assembly, locate instructions and hardware. take out all parts and compare them to the photograph and the assembly illustrations. Be sure you have all parts identified.

Check for screws that are wrapped in the packaging to be sure you dont discard them. You may have extra screws.

A helping hand is always good. Assemble the fireplace with an adult assistant if possible.

The cement log is heavy. Put the fireplace in the desired location before inserting cement log.

Use caution not to over tighten screws.

Step One

Figure 1

- Set the Base (1) on a flat, carpeted surface.
- Set the Left Side Panel (2) upright at left side of Base. Align lower edge of Side Panel with mounting blocks on the base so that the trapezoid-shaped mounting block is inside the Panel and the curved mounting blocks are outside the Panel. Push down on Panel until it rests firmly on Base.
- Repeat using Right Side Panel (3) at right side of Base.
- Set the Left Trim Post (4) in front of the Left Side Panel. Attach from back of unit at bottom by inserting Bolt through pre-drilled holes in mounting block, Side Panel and into anchor in Trim Post, using Allan wrench.
- Repeat with Right Trim Post (5).


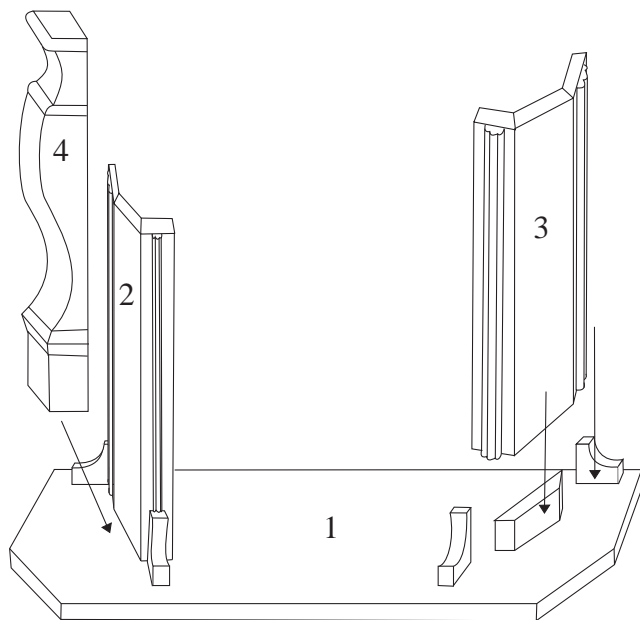


Figure 1

Step Two

Figure 2

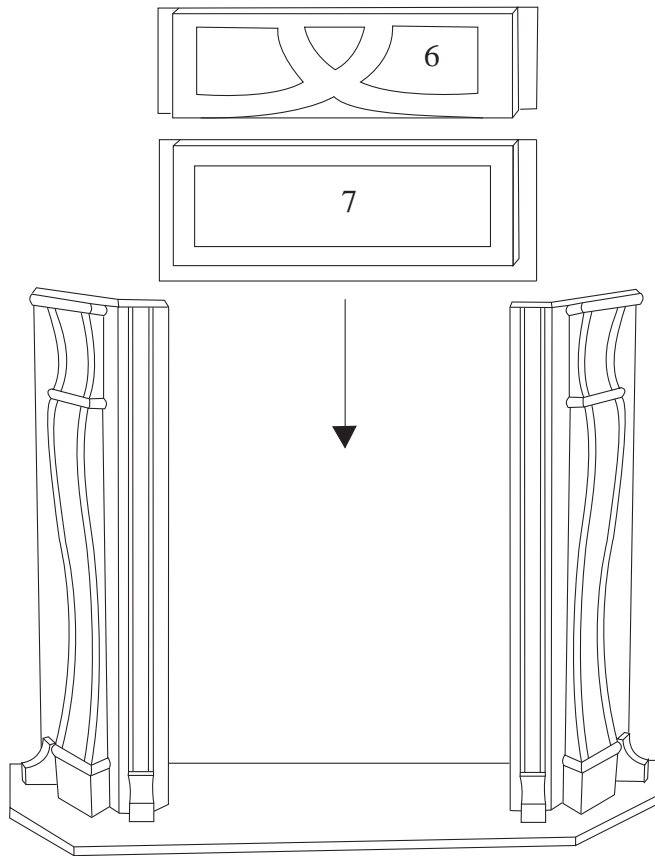

- Hold Center Panel (6) upright behind unit. Align top edge of panel with top edges of unit. Attach loosely with screws through pre-drilled holes at outer edges of Panel.


- From the back, slide Center Facing (7) under the lower edge of the Center Panel so that their edges align. Attach Facing with screws through pre-drilled holes at outer edge of Facing..

- Tighten screws holding Center Panel.

Figure 2

Step Three

Figure 3

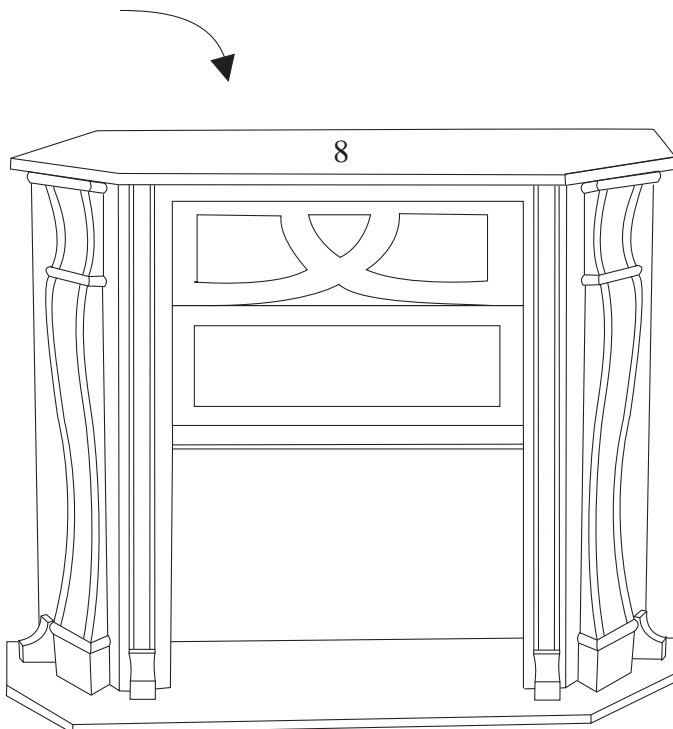

- Place Mantel Top (8) onto top of unit with mounting blocks behind tops of corners. Bolt from behind unit through pre-drilled holes in mounting blocks, side panels, and into anchors in Trim Posts. Tighten with Allan wrench.

You are now ready for the firebox installation. Please refer to the instructions that are included with your firebox.

Figure 3