



## Fireplace Model # 5100



**Instruction Manual**

---

# Instructions and warnings for use



Welcome to the Real Flame® family of gel fuel products. If you have any questions please call customer service at **1-800-654-1704** or log on to **www.REALFLAME.com**.

## STOP!

If parts are missing or damaged, call **1-800-654-1704** for assistance

### **WARNINGS**

1. Fireplace is designed to be used with Real Flame® gel fuel only. Do not use with any other gel fuel or any other flammable liquid or gel.
2. Read entire label and instructions before using Real Flame gel fuel.
3. Make sure fireplace is set on a flat, level and stable surface. Keep fireplace stable at all times.
4. Make sure fireplace and gel fuel are burned on a flat and level surface.
5. Never leave a burning fire unattended, especially around children or pets.
6. Fireplace is not to be operated by children. Keep away from children and pets.
7. Exercise the same precautions as you would with any open fire.
8. When in use some surfaces will be hot, use caution.
9. Never touch logs, gel fuel cans or any other metal surfaces during or immediately after burning gel fuel. They will be extremely **HOT**. Allow them to cool for 60 minutes before touching.
10. Do not burn more than three cans of fuel at once.
11. Do not place more than 15 lbs. of weight on the top of the fireplace at anytime.
12. Do not alter fireplace, metal firebox or log set in any manner.
13. Keep fireplace and gel fuel cans away from flammable materials at all times.
14. Do not store or use gasoline or any other flammable vapors, liquids, or materials in the vicinity of fireplace and gel fuel.
15. Do not wear flammable or loose clothing when operating the fireplace.
16. Do not move fireplace while in use. Do not attempt to move or store the fireplace until 60 minutes after gel fuel cans have been extinguished.
17. Do not burn trash, paper, or wood in the fireplace. Burn only Real Flame® gel fuel in the fireplace.
18. Do not burn gel fuel outside designated burn areas on the metal grate.
19. Do not put fireplace in an area with lots of traffic, such as a hallway or entryway.
20. In case of an emergency use a CO2 extinguisher to extinguish the fire.
21. Death, serious injury or damage to property may occur if the warnings above are not followed.
22. If for any reason you cannot follow these warnings please call us at 1-800-654-1704.

**NOTICE: Buyer assumes all responsibility for safety and use that is not in accordance with instructions and warnings.**

### Using your Fireplace


- Follow all instructions included with gel fuel before use.
- Before using Fireplace make sure you have read and understand the step-by-step instructions.
- During the initial burn you may experience a slight odor. This odor is temporary and will be absent on following burns.








# Real Flame Fireplace Mantel

## Model 5100 Assembly Instructions



Parts List			
Number	Description	Part Number	Quantity
1	Base	5101	1
2	Left Side Panel	5102	1
3	Right Side Panel	5103	1
4	Left Trim Panel	5104	1
5	Right Trim Panel	5105	1
6	Center Panel	5106	1
7	Center Facing	5106A	1
8	Front Trim	5106B	1
9	Mantel Top	5107	1
10	Arched Firebox	4094	1
11	Mantel Grate	0001	1
12	Mantel Log	2605	1
<i>(Pictured on page 5)</i>			
	Firebox Clips	1075	2
	1 3/4" Bolts	9719	8
	1" Screws	9713	Bag
	Allan wrench	9715-C!	1

### Get Ready


Before assembly, use scissors to unwrap the parts from the packaging. Check for hardware that is wrapped in the packaging to be sure you don't discard any. You may have extra hardware.

For easier assembly, use a power Phillips-head screwdriver.

**Caution:** Do not overtighten screws.

### Step One

*figure 1*

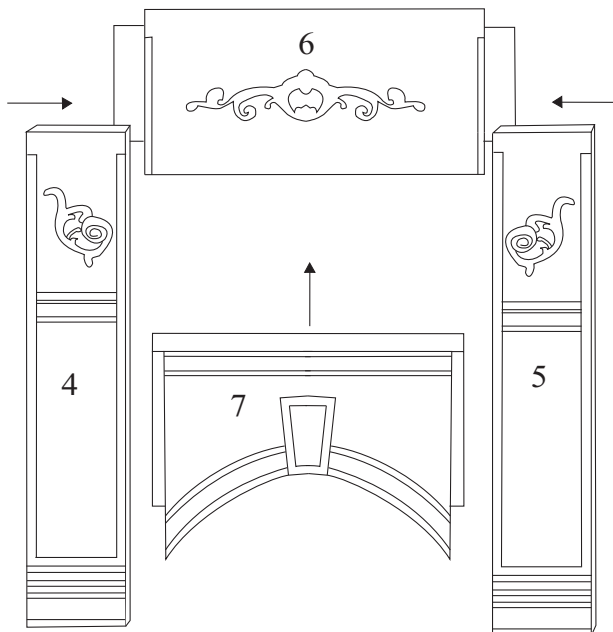

*figure 1*

- ▶ Set the Left and Right Trim Panels (4 & 5) face down on a carpeted surface about 3 feet apart. Set Center Panel (6) between Trim Panels so top aligns with upper edges of Trim Panels and mounting blocks are behind Trim Panels.
- ▶ Pressing Trim Panels in, attach Center Panel from the back with screws through pre-drilled holes in mounting blocks at outer edges of Center Panel.
- ▶ Set Center Facing (7) below Center Panel so that trim at upper edge of Facing overlaps front of Center Panel and edges align. Pressing Trim Panels in, attach Center Facing at each side with screws through pre-drilled holes at outer edges of Facing.

## Step Two

figure 2

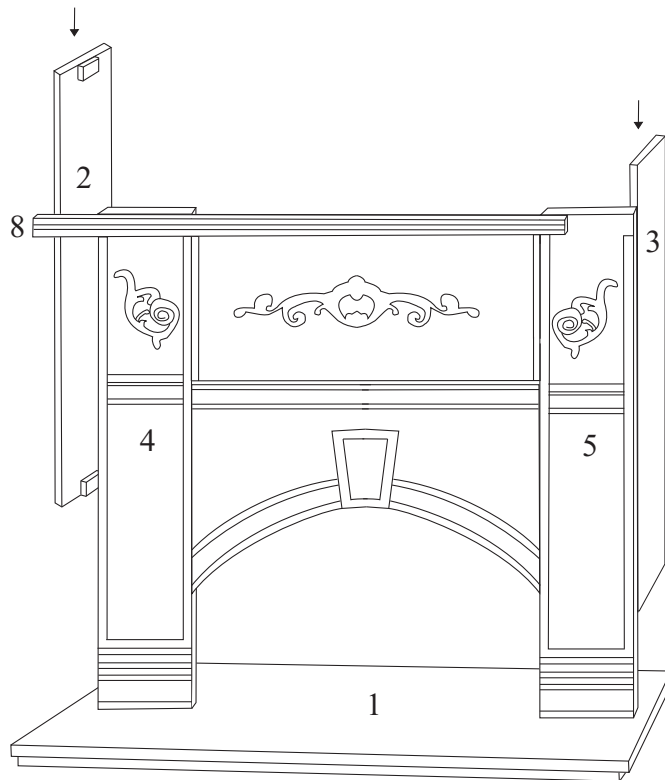


figure 2

- Set Base (1) on a flat, carpeted surface. Set assembled front of unit upright on Base in front of Base mounting blocks. Using Allan wrench, loosely insert bolts into anchors through pre-drilled holes in Base mounting blocks.
- Align Left Side Panel (2) with Left Trim Panel (4) using the tongue and groove edge as a guide and slide all the way to Base. Using Allan wrench, loosely insert bolts into anchors through pre-drilled holes in mounting blocks on Base.
- Repeat using right Side Panel (3) and Right Trim Panel (5).
- Gradually tighten all bolts attaching Side and Trim Panels to Base.
- Hold Front Trim (8) across front of unit so it is at top of Trim Panels. Attach with screws from back of unit through pre-drilled holes.

## Step Three

figure 3

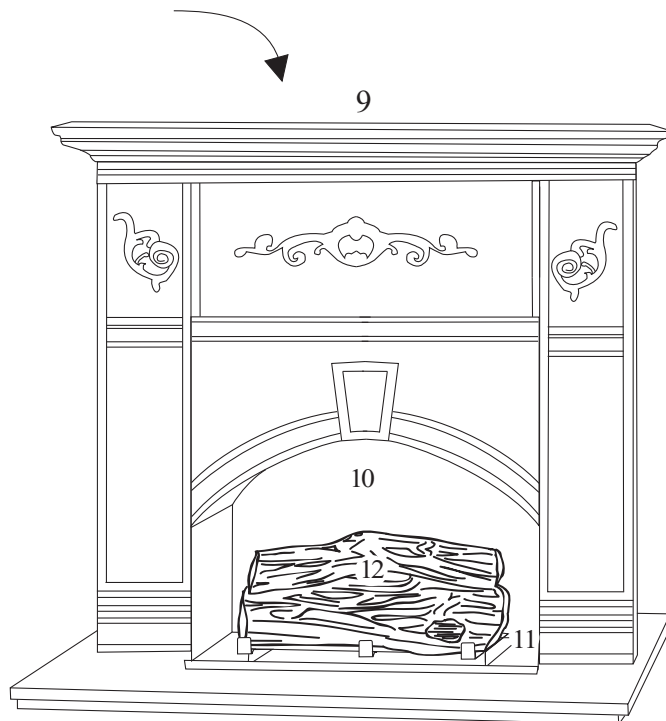


figure 3

- Place Mantel Top (9) onto top of unit so mounting blocks on back of Top align with mounting blocks at front and sides of unit. Top should fit snugly over unit so trim completely overhangs outside of unit.
- Bolt from behind unit through pre-drilled holes in front and side mounting blocks, and into anchors. Tighten with Allan wrench.

*Important: If you have purchased the optional screen kit go to the instructions included with the kit. Then proceed with step four.*